

Single, Up and Over Garage Door, Retractable Gear Type, Width Details

		Common Dimensions				70mm Wide Frame		FOR GRP DOORS 68mm Wide Frame	
Door Width			=W1+24	=W1-100	=W1-36	=W1+140	=W1+160	= W1 + 136	=W1 + 146
Imp	mm	W1	W2	W3A	W3B	W4	W5	W4	W5
6'10"	2085	2085	2109	1985	2049	2225	2245	2221	2231
7'0"	2134	2134	2158	2034	2098	2274	2294	2270	2280
7'3"	2210	2210	2234	2110	2174	2350	2370	2346	2356
7'5"	2261	2261	2285	2161	2225	2381	2421	2397	2407
7'6"	2286	2286	2310	2186	2250	2426	2446	2422	2432
8'0"	2438	2438	2462	2338	2402	2580	2598	2574	2584
9'0"	2743	2743	2767	2643	2707	2883	2903	N / A	N / A
10'0"	3048	3048	3072	2948	3011	3188	3208	N / A	N / A

W1 = Internal Frame Width

W2 = Minimum Brickwork Opening

W3A = Clear Drive through Width – Above the Crank of the Pivot Arm

W3B = Clear Drive through Width – Below the Crank of the Pivot Arm

W4 = External Frame Width

W5 = Recommended Brickwork Opening Width

NOTE – The crank in the pivot / lever arm is


1000mm from the floor on a 1981mm high door

1100mm from the floor on a 2134mm high door

NOTE – When the Side Wall is more than 400mm away from the opening aperture then use NFSP 0501

"Adjustable Track Hanging Kit" this allows the tracks to be hung from the rafters above

Fitting behind the opening

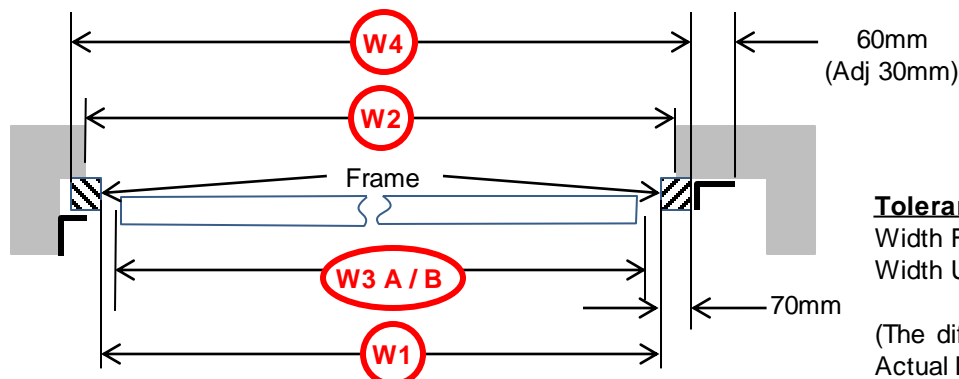


Tolerance:-

Width Framed Doors = 8mm

Width Un-Framed Doors = 18mm

(The difference between the Actual Door Panel and the Internal Frame Dimensions)

Fitting within / between the opening

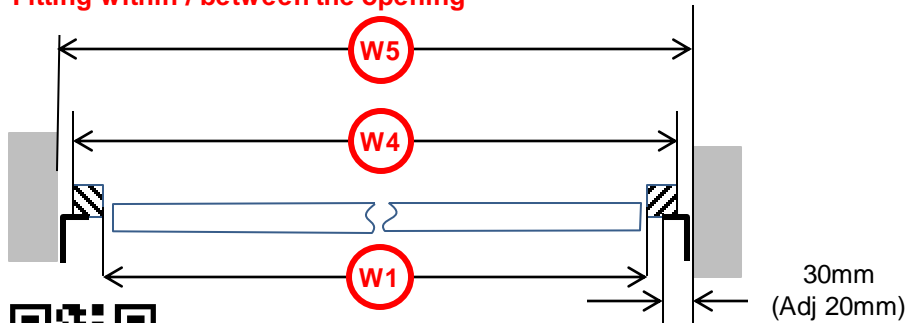

Frame Leg Dimensions

Width = 70mm

Depth = 40mm



info@garagedoordirect.uk
www.garagedoordirect.uk
T 0800 009 3161
September 2023

